

colourWOOD



cladding

a standard range of Western Red Cedar pre-coated CLADDING profiles

the many advantages of Western Red Cedar


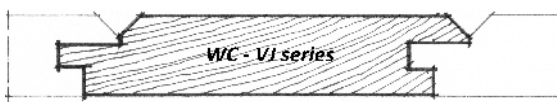



- surprisingly price competitive
- readily available
- superior range of lengths
- striking natural grain & colours
- dimensional stability
- superior environmental credentials
- natural renewable resource
- concealed nail fixing profiles
- readily accepts oils, stains & paints



the many advantages of colourWOOD

- coating on all faces & edges
- exceptional dimensional stability
- economical factory application
- Q.C. ensures coating thickness
- great range of standard colours
- custom colour options
- choice of oil OR stain finishes
- applied under controlled conditions
- if on-site painting is specified, colourWOOD can be factory pre-primed

colourWOOD Western Red Cedar Claddings are available in a four profiles with a wide range of options
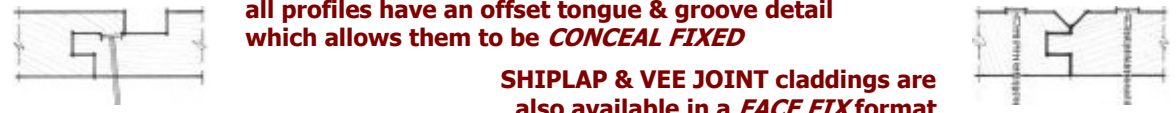
<p>SHIPLAP – 3 widths & 2 thicknesses</p>  <p>WC - SA, SB, SC series</p> <p>Available with 6, 12 & 18 mm wide groove</p>	<p>VEE JOINT – 3 widths & 2 thicknesses</p>  <p>WC - VJ series</p> <p>Vee is 45 degree face off 1 mm shoulder</p>
<p>EASED EDGE – 3 widths & 2 thicknesses</p>  <p>WC - EA, EB, EC series</p> <p>Available with 6, 12 & 18 mm wide groove</p>	<p>RUSTICATED – 2 widths & 1 thickness</p>  <p>WC - RC series</p>
<p>all profiles have an offset tongue & groove detail which allows them to be CONCEAL FIXED</p> <p>SHIPLAP & VEE JOINT claddings are also available in a FACE FIX format</p> 	

in addition to these four profiles in the colourWOOD range, other claddings options include Bevel Siding and the heavily sculptured Décor Series

consult our web site for full details on all cladding profiles and options

colourWOOD factory pre-coated claddings are finished with CUTEK CD50 penetrating oil.

CD50 provides a natural looking finish, is easily maintained and recoated, is non film forming and ideal for claddings in both weather protected and weather exposed areas.

Our recommended factory application is one coat. The process starts with a finely moulded cladding board. The oil finish is then applied all round by state of the art automatic spray equipment.

With penetrating oils on Western Red Cedar claddings, **we recommend a second on-site coat** be applied after completion of the fixing. The second coat will intensify any colour tones and enhance the final appearance.

A two coat factory application is available but it requires longer lead time (for drying) and finished products require added on-site protection and handling care – TIMBECK staff can provide more details.

The plant & equipment utilised in the production of TIMBECK's colourWOOD range of standard cladding products provides the finest of finishes available from any pre-coating facility available in the country today.

CUTEK CD50 Penetrating Oil - Standard Colour Range

Images depicted below are from original photographs taken under natural light conditions. The colours displayed are the result of two coats of oil on Western Red Cedar.


Colour accuracy is often compromised when digital images are displayed on different viewing platforms or reproduced on printed material. Samples of all options are readily available and we strongly recommend you closely consult these before reaching a final decision on colour.



NATURAL – true colours – no tint



GREY MIST – soft grey tint

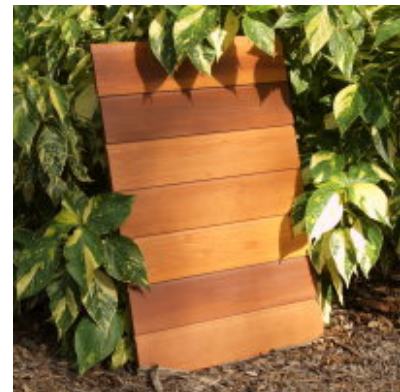

CEDARTONE – light cedar tint



BURNT RED – light red-brown tint



WALNUT – mid brown tint



BLACK ASH – transparent black

Information provided relates specifically to colourWOOD's standard range of Pre-Coated Claddings. TIMBECKS "Custom Coating" service is also able to apply most colours from most coating manufacturers should your specification call for that.

Please contact us if more information is required.



colourWOOD
TIMBECK Cedar Products
www.timbeck.com.au
issue A – April 2011

Brisbane - 07 3888 7788
Sydney - 02 9709 4466
info@timbeck.com.au